

PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6: H01M 8/04, 8/10, 8/24		A1	(11) International Publication Number: WO 98/13891
			(43) International Publication Date: 2 April 1998 (02.04.98)
(21) International Application Number: PCT/US97/17248		(81) Designated States: AL, AM, AT, AU, AZ, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 25 September 1997 (25.09.97)		Published With international search report. Before the expiration of the time limits for amending the claims and to be republished in the event of the receipt of amendments.	
(30) Priority Data: 60/027,489 27 September 1996 (27.09.96) US 08/873,049 11 June 1997 (11.06.97) US			
(71) Applicant: THE REGENTS OF THE UNIVERSITY OF CALIFORNIA [US/US]; Business and Patent Law, Mail Stop D412, Los Alamos, NM 87545 (US).			
(71)(72) Applicants and Inventors: WILSON, Mahlon, S. [US/US]; 85 Mesa Verde, Los Alamos, NM 87544 (US). ZAWODZINSKI, Christine [US/US]; 86 Joya Loop, Los Alamos, NM 87544 (US).			
(74) Agents: WILSON, Ray, G. et al.; Los Alamos National Laboratory, Mail Stop D412, Los Alamos, NM 87545 (US).			

(54) Title: FUEL CELL WITH METAL SCREEN FLOW-FIELD

(57) Abstract

A polymer electrolyte membrane (PEM) fuel cell (10) is provided with electrodes supplied with a reactant on each side of a catalyzed membrane assembly (CMA) (18). The fuel cell (10) includes a metal mesh (48) defining a rectangular flow-field pattern having an inlet (44) at a first corner and an outlet (46) at a second corner located on a diagonal from the first corner, wherein all flow paths from the inlet (44) to the outlet (46) through the square flow-field pattern are equivalent to uniformly distribute the reactant over the CMA (18). In a preferred form of metal mesh (48), a square weave screen forms the flow-field pattern. In a particular characterization of the present invention, a bipolar plate (82) electrically connects adjacent fuel cells (60), where the bipolar plate (82) includes a thin metal foil having an anode side and a cathode side; a first metal mesh (12) on the anode side of the thin metal foil; and a second metal mesh (14) on the cathode side of the thin metal foil. In another characterization of the present invention, a cooling plate assembly cools adjacent fuel cells (10), where the cooling plate assembly includes an anode electrode (34) and a cathode electrode (36) formed of thin conducting foils; and a metal mesh flow field (16) therebetween for distributing cooling water flow over the electrodes to remove heat generated by the fuel cells (10).

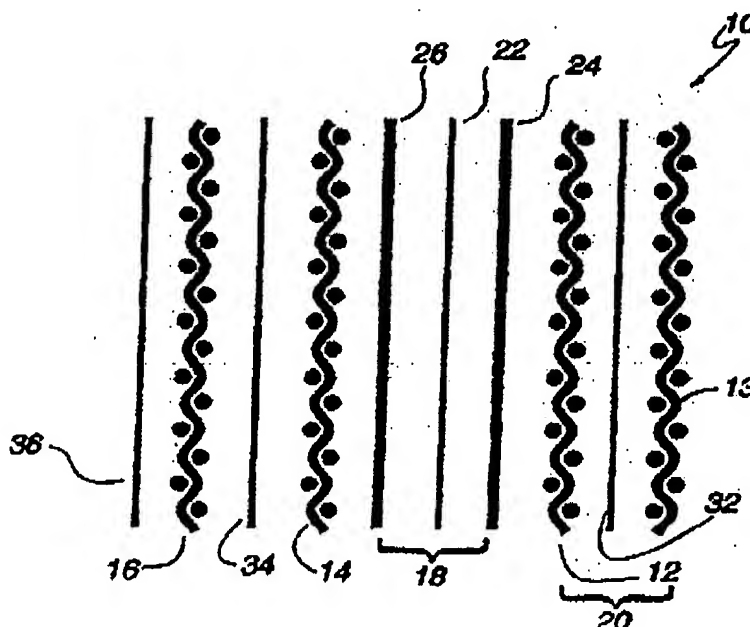**BEST AVAILABLE COPY**

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LR	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SS	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MM	Myanmar	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

WO 98/13891

PCT/US97/17248

1

FUEL CELL WITH METAL SCREEN FLOW-FIELD

BACKGROUND OF THE INVENTION

5 This invention relates to electrochemical fuel cells, and, more particularly, to polymer electrolyte membrane fuel cells. This invention was made with government support under Contract No. W-7405-ENG-36 awarded by the U.S. Department of Energy. The government has certain rights in the invention.

10 The fuel cell converts chemical energy to electrical power with virtually no environmental emissions. A fuel cell differs from a battery in that it derives its energy from supplied fuel, as opposed to energy stored in the electrodes in the battery. Because a fuel cell is not tied to a charge/discharge cycle, it can in principle maintain a specific power output as long as fuel is continuously supplied.

15 One of the more commercially attractive types of fuel cells is the polymer electrolyte membrane (PEM) fuel cell. A single PEM cell consists of an anode and a cathode compartment separated by a thin, ionically conducting membrane. Hydrogen and oxygen (either pure or in air) are supplied to the anode and cathode compartments, respectively. The PEM prevents hydrogen and oxygen from directly mixing, while allowing ionic transport to occur. At the anode, 20 hydrogen is oxidized to produce protons. These protons migrate across the membrane to the cathode and react with oxygen to produce water. The overall electrochemical redox (reduction/oxidation) reaction is spontaneous, thus, energy is released as well. When several "unit" cells are combined in a stack, higher voltages and significant power outputs can be obtained.

WO 98/13891

PCT/US97/17248

2

The advantages offered by a PEM fuel cell (e.g. its low operating temperature and non-liquid, non-corrosive electrolyte) make it attractive as a potential energy source for transportation and for portable and stationary power applications. Fuel cells have been successfully implemented in a number of utility, aerospace and military applications, but the high cost of fuel cells compared to conventional power generation technologies has deterred their potentially widespread commercial adaptation.

The high costs are primarily due to the catalyzed membrane assembly (CMA) and the bipolar/flow-field plates. The CMA consists of the PEM/conductive backing structure which typically utilizes exotic and expensive materials such as a platinum catalyst. Flow-field plates are commonly graphite or specially coated metal plates that have been machined to contain channels through which gas flow is directed across the plate. A bipolar plate has channels on each side to provide reactants to the anode and cathode of adjacent cells in a stack and may also incorporate some form of cooling channels. Stack manufacturers have historically used high-platinum loaded CMAs and intricately machined graphite bipolar plates, which have made the cost of a fuel cell much too expensive for most commercial applications.

An ideal bipolar plate would be a thin, light-weight, low-cost, durable, highly conductive, corrosion resistant structure that provides an effective flow-field configuration. The conventional flow-field design consists of a number of channels machined into a graphite or metal plate and is configured to provide relatively uniform reactant distribution combined with effective water removal. Until recently, achieving an effective flow-field design has come at the expense of tolerating thick and/or heavy bipolar plates with high material and machining costs.

WO 98/13891

PCT/US97/17248

3

The most commonly utilized bipolar plate material, graphite, is conductive and corrosion resistant, but it is expensive and not very durable due to its brittleness. Titanium has been used to a lesser extent. Though it is extremely hard and can be treated (e.g., nitrided) to provide adequate conductivity and excellent corrosion resistance, it is prohibitively expensive, heavy, and difficult to machine.

A number of technologies are being considered to replace machined bipolar plates in an effort to lower costs. Two of the more popular approaches considered are (1) the use of composite materials, such as the commercially available Kynar/graphite molded plates, and (2) relatively conventional flow-field/bipolar plate designs using mass production metal fabrication techniques in contrast to the piecewise machining currently being done. At present, these approaches have yielded only small incremental changes in fuel cell costs.

In a departure from conventional flow-field designs and fabrication techniques, U.S. Patent 5,482,792 teaches the use of porous electroconductive collectors to distribute reactants and reaction products and to distribute electrical current to the electrodes. In one embodiment suitable collectors can be metal-wire fabrics or screens, wherein the wires form a series of coils, waves, or crimps, or other undulating contour. The collectors are situated within a gasket frame through which reactants are supplied to (and removed from) the collectors by a series of channels. These channels span the width of the collectors to attempt to evenly distribute reactants and reaction products. The gasket frame, which is made of a castable, elastomeric material (2 mm/0.079 in.) thick, seals against a metal frame, referred to in the patent as the bipolar plate. The bipolar plate separates adjoining cells within a stack and is also used for cooling the cells with which it is in contact. In the preferred configuration, the bipolar plate is made of aluminum and is necessarily thick (5 mm/0.197 in.) in order to

WO 98/13891

PCT/US97/17248

4

adequately withdraw heat generated by the cell. Bipolar plates made of materials with lower thermal conductivities, such as stainless steel, are thinner (3 mm/0.118 in.), but have a more complicated design in order to accommodate extra channels for forced air cooling.

5 In addition to lowering or eliminating machining costs, another primary objective in bipolar plate design is to minimize thickness. While this may be of secondary importance for stationary power applications, the weight and size of the fuel cell stack has substantial implications in transportation applications. Minimizing bipolar plate thickness lowers stack weight, volume, and cost of
10 materials, with a concomitant increase in the fuel cell power density. Stacks of individual unit fuel cells based on graphite hardware typically have low cell pitches (e.g., 1.6 cells/cm, 4 cells/inch) because the bipolar plates must be sufficiently thick to avoid cracking. Even though the stacks disclosed in U.S. Patent 5,482,792 use metal components, a low pitch is still obtained because of
15 the overall stack configuration.

Accordingly, it is an object of the present invention to provide a simpler and more effective reactant and cooling flow distribution configuration than provided by known bipolar plates.

20 Another object of the present invention is to provide uniform reactant distribution over a fuel cell membrane without machined bipolar plates.

Yet another object of the present invention is to provide thin, compact, and relatively light-weight cell "cartridges" that are mini-stacks containing two or more individual fuel cells, wherein adjacent cartridges are separated by a cooling plate when combined to form larger stacks.

25 Additional objects, advantages and novel features of the invention will be set forth in part in the description which follows, and in part will become apparent to those skilled in the art upon examination of the following or may be learned by practice of the invention. The objects and advantages of the invention may be

WO 98/13891

PCT/US97/17248

5

realized and attained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

SUMMARY OF THE INVENTION

5 To achieve the foregoing and other objects, and in accordance with the purposes of the present invention, as embodied and broadly described herein, the apparatus of this invention may comprise a polymer electrolyte membrane (PEM) fuel cell having electrodes supplied with a reactant on each side of a
10 membrane electrolyte assembly (CMA). The fuel cell includes a metal mesh defining a flow-field pattern having an inlet confined to a first corner and an outlet confined to a second corner located on a diagonal from the first corner, wherein all flow paths from the inlet to the outlet through the square flow field pattern are equivalent to uniformly distribute the reactant over the CMA.

15 In a particular characterization of the present invention, a bipolar plate electrically connects adjacent fuel cells, where the bipolar plate includes a thin metal foil having an anode side and a cathode side; a first metal mesh on the anode side of the thin metal foil; and a second metal mesh on the cathode side of the thin metal foil. In another characterization of the present invention, a
20 cooling plate assembly cools adjacent fuel cells, where the cooling plate assembly includes an anode electrode and a cathode electrode formed of thin conducting foils; and a metal mesh flow field therebetween for distributing cooling water flow over the electrodes to remove heat generated by the fuel cells.

25 The fuel cells of the present invention may also form a fuel cell cartridge. At least two fuel cells are connected with adjacent ones of the fuel cells separated by electrically conductive, thin foil bipolar plates. A first thin foil bipolar plate forms a cathode at a first end of the connected fuel cells and a second thin foil bipolar plate forms an anode at a second end of the connected fuel cells.

WO 98/13891

PCT/US97/17248

6

First and second wire mesh flow fields contact the first and second thin foil bipolar plates, respectively, for removing heat generated by the connected fuel cells.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated in and form a part of the specification, illustrate the embodiments of the present invention and, together with the description, serve to explain the principles of the invention. In the drawings:

10

FIGURE 1 is a cross-sectional schematic of a fuel cell with a metal screen flow-field in accordance with one embodiment of the present invention.

FIGURE 2 is a plan view of a metal screen flow-field shown in FIGURE 1.

FIGURE 3 is a schematic illustration of flow distribution over a metal screen flow-field

15

FIGURE 4 is an exploded view of a fuel cell according to one embodiment of the present invention.

FIGURE 5 is an exploded schematic of an exemplary catalyzed membrane assembly used in the fuel cell shown in FIGURE 1.

20

FIGURE 6 is an exploded view of a fuel cell cartridge according to one aspect of the present invention, where the cartridge is formed from two unit cells.

FIGURE 7 is an exploded view of an assembly of cartridges, where adjacent cartridges are separated by removable cooling plates.

FIGURE 8 graphically depicts performance characteristics of a fuel cell using a stainless steel screen flow-field and metal foil separator plates.

25

FIGURE 9 graphically depicts fuel cell resistance as a function of cell operating hours for the cell configuration shown in FIGURE 1.

FIGURE 10 graphically depicts fuel cell operating parameters after 24 hours and 800 hours of operation.

WO 98/13891

PCT/US97/17248

7

FIGURE 11 graphically depicts fuel cell resistance over 2000 hours of operation.

DETAILED DESCRIPTION OF THE INVENTION

5 In accordance with the present invention, fuel cell thickness is reduced by using thin metal or carbon foils in place of conventional bipolar plates. The fuel cell flow-fields are based on wire mesh configurations, which may be simple diagonal path-equivalent patterns formed of various metals including stainless steels for uniform water and reactant distribution over a fuel cell electrolyte assembly (CMA) or bipolar plate surface. Figure 1 is a cross-sectional schematic of one embodiment of a fuel cell 10 that incorporates woven wire-mesh screens as flow-fields for the reactants and for cooling: anode (hydrogen) flow-field 12, 10 cathode (oxygen or air) flow-field 14, and, optionally, coolant flow-field 16. In one aspect of the invention, bipolar foil 20 is formed by anode flow field 12 of cell 10, cathode flow-field 13 of an adjacent fuel cell, and conducting foil 32. CMA 18 15 is sandwiched between flow-fields 12 and 14, and includes catalyzed membrane 22 sandwiched between backings 24 and 26, further discussed below. Flow-fields 12, 14, 16 are sandwiched between thin metal foils 32, 34, 36, respectively, to create a thin fuel cell configuration for use in a fuel cell stack, i.e., 20 a series-connected array of fuel cells, to reduce the volume of a fuel cell stack and increase the overall power density.

Major advantages of using simple flow-fields, such as woven wire screens, include the elimination of expensive raw materials costs and machining and/or other special fabrication costs. Many types of screens are readily 25 available in a variety of thicknesses and mesh sizes. An additional benefit of the screens is that they are relatively light-weight in comparison to thick graphite or solid metal plates. Other advantages with metal screens are 1) the screens are not brittle and very thin unit cells may be possible, 2) sheet metal and screen

WO 98/13891

PCT/US97/17248

8

fabrication and die-cutting are "commodity" processes compared to the specialized composite molding processes, and 3) metal screens may permit more effective stack designs in that tolerances can be more precise and unit cells may possibly be thinner than with the molded composites.

5 Referring now to Figure 2, a diagonal path-equivalent flow-field 42 in this invention is configured such that the reactant flow introduction is limited to one corner, e.g., corner 44, and the effluent discharge is limited to the opposing corner, e.g., corner 46. In one embodiment using a wire screen, wire screen 48 is oriented such that the wires of the weave are parallel to the edges of the
10 screen, which is sealed around the periphery with gasket 52 except for the opposing manifolded corners.

In the over-and-under weave of a simple square weave mesh wire screen shown in Figure 3, flow between the small box regions defined by the interwoven wires can only be between elements with common sides. The two wires stacked
15 on one another that define a corner of an element prevents flow between diagonal elements in the interweave sections. Thus, if one considers the simple schematic in Figure 3, the flow can only be in the (x) or (y) directions through the weaves of the screen.

Two possible flow-paths are shown in Figure 3. Path (a) proceeds straight
20 in the (-y) direction and then straight in the (+x) to the exit while closely passing by the distant lower-left corner. Path (b) proceeds along the diagonal, but because of the x-y flow preference, the flow follows a staircase-like path. Once the total length of all the individual segments in the staircase are summed, the lengths of paths a) and b) are identical. Therefore, the flow rate along each path
25 should be equivalent. In practice, the flow is surprisingly uniformly distributed throughout the entire flow-field and there are no dead spots in the far corners as may be intuitively expected.

WO 98/13891

PCT/US97/17248

9

The flow configuration shown in Figure 3 was confirmed by the use of a wire screen square flow-field mock-up in a transparent plastic housing to observe the reactant flow distribution and water accumulation in a simulated cathode flow-field. Air was introduced at 3 atm pressure at a flowrate equivalent to 1 A/cm² at 50% oxygen utilization and humidified above the saturation point within the cell to replicate two-phase flow conditions. The water vapor would fog the cool surface of the housing. Condensed water droplets passing through the flow-field would wet the wall and clear the surface until it had a chance to fog again. It was thus possible to observe the condensed water streamlines. The patterns formed by the streamlines demonstrated that the flow was uniformly distributed over the entire flow field, even to the distant corners. Water removal was effective and there were minimal and only temporary accumulations within the flow-field.

As contemplated by the present invention, the shape of the flow-fields is not limited to a square. Rectangles based on square or rectangular meshes also provide equivalent flow-paths with corner-to-corner flow. In addition, the corner-to-corner elements can be a building block to larger arrays. For example, the active area of a cell could be n elements wide. Two inlets could be positioned at $1n$ and $3n$ along the top edge, and the three outlets could be placed at $0n$, $2n$, and $4n$ along the bottom. Each n th element is then supplied with corner-to-corner flow. The manifold penetrations for the flow-field for the opposing electrode (or the flow-field on the backside of the plate) would then occupy the off-corners to the first flow-field. A two-dimensional extension of this concept would result in arrays in both directions with manifold penetrations in the active area that each supply (or receive) flow to four corner-to-corner elements oriented around it.

An advantage of using corner-to-corner flow in an internally manifolded fuel cell stack 60, shown in Figure 4, is in the simplicity and compactness of the

WO 98/13891

PCT/US97/17248

10

manifold to flow-field transition. Since the two different sets of opposing corners, e.g., 84 and 86 in gasket 64 and 88 and 92 in gasket 66, can be used for the anode and cathode reactant flows, a simple channel connecting a manifold penetration to each corner is all that is needed, as is shown in Figure 4. In one embodiment, slots 84/86 and 88/92 are cut in gaskets 64 and 66, respectively to define the flow routes. In another embodiment, the gaskets are replaced by thin, rigid plastic frames coated with adhesive for sealing. Large distribution channels, as typically used with numerous small, parallel channels or with "porous" flow-fields are not required, which simplifies the configuration and allows more of the footprint to be active electrode area.

Another, more subtle, advantage lies in the nature of the flow dynamics. With corner-to-corner flow across wire-screens 68, 72, 74, and 76, the relative space velocity of the reactants is much greater at the entrance and exit. When operating the cathode on air (or the anode on a dilute hydrogen stream), this acts to increase the uniformity of the current distribution over conductive backings 112, 114 (Figure 5) compared to a more conventional set-up with a constant space velocity in all areas (neglecting reactant consumption).

In order to maintain the integrity of the membrane/cooling plate assembly 62 during assembly and sealing, it is another feature of the present invention to form the CMA shown in Figure 5 as a rigid frame with conductive, gas diffusion backings 112, 114 pressed against opposed surfaces of membrane 102. In an exemplary embodiment, the periphery of membrane 102 around the active area is sandwiched between two 0.254 cm/0.010 in. thick SS sheets 104, 106 cut into the appropriate configuration. Industrial strength adhesive (0.051 mm/0.002 in. thick) is first applied to SS sheets 104, 106 and the components are bonded together under pressure. Membrane 102 is then trapped in a structure that is easily handled and does not change dimensions. This simplifies assembly and part reproducibility. The picture frame assembly can be pretested for the

WO 98/13891

PCT/US97/17248

11

integrity of membrane 102 (e.g. no gas cross-over). The stiffness of the structure prevents membrane 102 from falling into the channels cut into gaskets 64, 66 (Figure 4) to connect manifolds 94A, D, E, H (Figure 4) to the flow-field (e.g., channels 84/88, 92/86, in Figure 4) which would cause leakage of the reactants in the gap thus formed opposite of the channel.

In another embodiment, a thin, rigid plastic frame combines the gasket and stainless steel picture frame (e.g., frame 106 and gasket 66). The plastic frame, which is made of polysulfone, is coated on both sides with a high bond adhesive (0.051 mm/0.002 in. thick), and resembles frame 106 in that it traps the CMA in a rigid structure. However, because a separate gasket 66 is no longer required, the plastic frame must provide reactant access from the manifold hole to the flow-field. Channels corresponding to, e.g., slots 88, 92 in gasket 66, are formed as grooves from the opposing corner manifold holes to the open active area in the gasket side of the combined frame. The gasket side of the frame contains the flow-field hardware and is adhered directly to the conducting metal foil, e.g., foil 82. The other side of the frame is smooth (no grooves) and is adhered to membrane 102 (Figure 5).

In an exemplary embodiment, membrane 102 (Figure 5), which is situated between the anode 68, 74 and cathode 72, 76 screens, consists of a 100 cm² active area catalyzed Nafion™ membrane (Nafion 112 from DuPont) and two E-TEK carbon cloth backings 112, 114 (each about 0.457 mm 0.018 in. thick, 100 cm²). To give the CMA physical stability, membrane 102 is enclosed within a thin metal "picture frame" (Figure 5). A high-bond adhesive is applied to one side of each of frames 104, 106 (stainless steel foil, 0.254 mm/0.010 in. thick each). These frames are die-cut to form penetrations for the manifolds (Figure 4, 94A-H) and the window for the active area of membrane 102. The ionomeric membrane is sandwiched between the two adhesive-coated sides of the frames and the assembly is pressed together. Membrane 102 is trimmed from the

WO 98/13891

PCT/US97/17248

12

manifold holes using standard cork borers. Carbon cloth backings 112, 114 are then pre-pressed to the membrane at ambient temperature and approximately 1.2 atm of pressure. The finished product of CMA 62 (and backings) encased within a rigid frame assures proper alignment of CMA 62 within the cell and enhances sealing.

Referring again to Figure 4, unit cell 60 is built around the picture frame CMA 62. In a preferred embodiment, the wire-screen flow-fields on either side each consist of two metal screens 68, 74 and 72, 76 (each 10 x 10 cm) that sit within a gasket "frame" 64, 66, respectively, that is applied to a metal foil 78, 82, respectively. Relatively coarse screens 74, 76 (24 x 24 mesh, 0.356 mm/0.014" diameter wire) serve as the main gas flow-fields and are placed directly against foils 78, 82. A fine screen 68, 72 (60 x 60 mesh, 0.191 mm/0.0075" diameter wire), is laid on top of each coarse screen 74, 76 flow-field. Fine screens 68, 72 serve as a physical barrier between coarse screens 74, 76 and carbon cloth backings 112, 114 (Figure 5) of CMA 62, which is located between the anode and cathode flow-fields. The tight weave of fine screens 68, 72 acts to keep carbon cloth backings 112, 114 of CMA 62 from "falling" into the open weave of coarse screens 74, 76, but still allows reactant and water vapor to reach the CMA.

In practice, however, a fine screen can collect water over time. The square openings formed by the tight weave act as hydrophilic "cages," trapping water and decreasing reactant access to the CMA. This problem has been overcome by providing a hydrophobic coating on the fine screens prior to use to prevent water from collecting in the openings. In one embodiment, the fine screens were pretreated with a mixture of carbon black and Teflon.

If a relatively soft material is used for conductive backings 112, 114 without fine screens 68, 72 in place, the backing becomes embedded in the

WO 98/13891

PCT/US97/17248

13

coarse screen, resulting in relatively high pressure drops and cell resistance result. An exemplary effect of the fine screens is shown in Table A.

Table A

Fine Screen	Pressure Drop psi	Cell Resistance $\Omega\text{-cm}^2$
Without	6	>0.5
With	2	0.15

5 Additionally, thin, flattened expanded metal mesh and perforated plates can and have been utilized in place of the fine screen. Perforated plates in particular appear to provide an advantage to fine screens in terms of water management within the cell. By design, a perforated plate can have larger "openings" and "islands" that more nearly replicate the configuration obtained
10 with conventional channeled flow-fields and still provide adequate reactant access to the CMA, protect the backing from blocking the coarse screen, and yet be very thin. The coarse screen continues to serve as the flow field for water distribution. Because a thin perforated plate with large openings does not tend to trap water (such as the fine weave screen does), it is not necessary to
15 hydrophobize the structure. Perforated plates have been made of 316 stainless steel (SS), with a thickness of only 0.127 mm/0.005 in. and with penetrations of 1.016 mm/0.040 inches diameter on a 1.324 mm/0.060 in. stagger.

 It is a particular feature of this invention to use thin metal foil separators
20 78, 82 (0.254 mm/0.010 in. thick in this embodiment) adjacent flow-field screens 68/74 and 72/76, respectively to be used in a bipolar configuration. As shown in Figure 1, in a stack of unit cells 10, the set of screens 12 on one side of foil 32 would be the anode flow-field for one cell, whereas screens 13 on the other side of foil 32 would be the cathode flow-field for the neighboring cell. The assembly of screens 12 and 13 with foil 32 forms a novel bipolar configuration with screen

WO 98/13891

PCT/US97/17248

14

flow-fields. The metal screens provide some structural support and eliminate the need for machining of the metal separator plates so that thin foils may be used. As used herein, the term "thin" means metal foils having a preferred thickness less than about 0.508 mm/0.20 in. in order to minimize the composite thickness of a unit cell 60 (Figure 4).

As shown in Figure 1, cooling may be provided by sandwiching two of the metal foil separators 34, 36 around a cooling flow-field 16, and the anode and cathode flow-fields then sandwich the foil separators. Either of the remaining sets of manifold penetrations, e.g., manifold penetrations 94B/G or 94C/F (Figure 4) can be used for the coolant. As with the reactant flows, a channel is formed in the gaskets adhered to plates 34 and 36 (Figure 1) to connect the manifold to the coolant flow-field. This flow-field may be a wire screen or a serpentine channel cut into a compressible, electronically conductive material such as graphite gaskets (e.g. Grafoil from Union Carbide). Figure 1 shows cooling flow field 16 adjacent cathode 34, but the cooling flow field could also be adjacent anode 32.

Channels 84, 86 and 88, 92 (Figure 4) for the corner-to-corner flow are cut directly into gasket frames 64 and 66, respectively. The gaskets are made of 1.524 mm/0.060 in. thick fabric-reinforced silicone tape. The silicone is a closed-cell foam, which can be easily compressed to provide a gas-tight seal, yet not require excessive force to accomplish an effective seal. This supplies substantial leeway in matching the seal thickness with the thickness of the compressed cell. The compression of the cell may be controlled by introducing rigid "tabs", e.g., tabs 65 and 67, of the appropriate thickness located at the beveled outer corners of the gasket frame to control the compression of the cell. As such, the gasket can be compressed to no less than the thickness of the tabs, which assures uniform compression across each cell. This is important in a stack, because each cell must be pressed to the same degree to assure equal

WO 98/13891

PCT/US97/17248

15

distribution of reactant flow and uniformity of cell performances. In the embodiment in which a rigid plastic frame replaces the gasket/stainless steel picture frame, tabs are unnecessary because the frame itself serves to control compression of the cell contents.

5 The unit cell 60 depicted in Figure 4 is approximately 3 mm/0.118 in. thick, providing for a thin, compact design in which the active area comprises about 60% of the total area encompassed by the metal foils and frames. Because the individual cell components are adhered together between metal foils, the resulting structure is a one-piece unit that is referred to herein as a
10 "cartridge." A cartridge can contain one or several cells that share separator foils as well as cooling plates. However, there are advantages to retaining the cooling plate as a separate structure.

 In an exemplary structure shown in Figure 6, cartridges are formed of two cells 60. Larger stacks are assembled by combining cartridges together with
15 removable cooling plates that separate the units, as further shown in Figure 7.

 An exemplary cartridge 120 is formed from two unit cells 60 that are connected in series at bipolar plates 78/82, which are thin metal foils. More than two unit cells may be connected, as shown in Figure 6, if cooling considerations permit. It will be understood that the components of unit cell 60 correspond to
20 like-numbered components in Figure 4 and are not discussed separately with respect to Figure 6.

 In a particular feature of the present invention, Figure 7 depicts cooling plates 126 between adjacent cartridges 120. Cooling plates 126 include wire screens 124 that are held in a frame assembly 132, that may also serve to
25 electrically connect adjacent cartridges 120 in series, if desired. Cooling flow is input/output through manifold openings 126/128 and is evenly distributed over wire screen 124, as discussed above. Wire screens 124 may be simply woven

WO 98/13891

PCT/US97/17248

16

mesh screens, but may be any suitable screen that provides fluid communication through the cooling volume between adjacent fuel cells.

5 In a test configuration, a cartridge is fixtured between gold-plated copper current collector plates, which in turn are placed between and electrically isolated from aluminum end-plates that incorporate fittings to supply the internal manifolds. Tie-bolts connecting the two endplates provide mechanical compression of the unit cells.

10 In summary, the use of flow connections to opposing corners of a square mesh wire screen or other flow-field material provides a configuration such that the effective lengths of all possible paths (that incrementally advance towards the outlet) are equivalent. Not only does such a scheme appear to be effective, but it greatly simplifies the configuration of the manifolding around the periphery in that it allows the fuel and oxidant reactant manifold penetrations to occupy the two sets of opposing corners and not overlap or interfere with one another.

15 The picture frame packaging of the CMA allows effective sealing when used with the wire screen flow-fields. A picture frame configuration has advantages even with conventional hardware because of the improved sealing surfaces and dimensional stability of the structure from the points of view of testing, handling, and assembly.

20 Additionally, the overall packaging of individual fuel cells into cartridges enables the quick and easy assembly of stacks and also makes it possible to remove and replace problem cells within a stack without compromising the remaining cells. Because the cartridges are relatively thin, high power density stacks are possible that are relatively small, compact, and
25 light-weight.

A polarization curve for a 100 cm² single cell assembled as described above is shown in Figure 8 operating on humidified, pressurized H₂/air (3/3 atm, 50% air utilization at 1 A/cm²). The CMA used in the picture frame consisted of a

WO 98/13891

PCT/US97/17248

17

Nafion 112 membrane with low platinum loading catalyst layers (0.14 mg Pt/cm²/electrode). The high frequency cell resistance was less than 0.15 Ω cm², which is high compared to small cells, but not unreasonable considering the numerous components and interfaces involved and the size of the active area. In any case, the cell provided about 0.5 W/cm² at 0.62 V (50% LHV voltage efficiency).

Cells with 304 SS wire screens and foils demonstrated loss of component conductivity with cell operation. The use of 316 SS instead of the 304 improves the stability of the metal structures. Thus, a cell was assembled using 316 SS components that were not surface treated beyond washing with soap and water to remove surface grime and then swiped with an organic solvent such as isopropanol or acetone to remove any last traces of grease or soap, or the like.

One such cell was operated for 2,000 h at a constant voltage of 0.5 V. Operating temperatures ranged from 70-80 °C for the cell itself, 90-110 °C for the hydrogen gas humidifier, and 70-80 °C for air humidification. Both the hydrogen and air gas streams were pressurized at 3 atm, and flow rates were maintained at approximately 2 and 4 L/min., respectively. These flows roughly correspond to 2X the stoichiometric amount of flow required to operate the cell at 1 A/cm². The cell was not internally cooled; instead it was air-cooled by an external fan.

The long term performance of the cell was monitored in a number of ways: by measuring voltage drops across the cell components, measuring high frequency resistance (HFR), and by periodically obtaining polarization curves. The stability of the metal hardware was quantified using voltage leads connected to the various metal components. With the cell set to operate at a fixed current, the voltage drops were measured between the various components, which allows the calculation of the contribution of the metal components to the cell resistance.

WO 98/13891

PCT/US97/17248

18

The 2,000 hour results are shown in Figure 9. The anode and cathode metal component contributions in this figure consist of the resistances of the components and interfaces between the fine screens (positioned against the CMAs) and their respective current collector plates. Thus the current traverses

5 1) the SS fine screen, 2) the SS flow-field screen, 3) an SS separator plate, and 4) the gold-coated current collector plate, which is a total of four components and three interfaces. Also shown in this figure is the total contribution of the metal hardware, calculated from the measured voltage difference between the fine wire sense leads and the current collector plates at a fixed current. The curves in

10 Figure 9 demonstrate that the contribution of the metal hardware is relatively stable. The exception to this conclusion occurred at about 800 hours when the tie-bolts holding the cell together were re-tightened, which brought the components together more forcefully and substantially improved the conductivity across the interfaces. The improvement in cell performance realized upon the

15 tightening of the tie-bolts is demonstrated in Figure 10. From the improvement in the low-current density region of the curves, it is evident that the performance was due to realizing more effective electrode performance rather than to the decrease in component resistance alone.

If the stainless steel was corroding or passivating, the voltage

20 measurements across the screens would tend to increase over time. This was not observed in Figure 9, which suggests either that corrosion was minimal or that the corrosion products were soluble. In the latter case, dissolution of the metal hardware would liberate polyvalent ions that could conceivably enter into the polymer electrolyte membrane and tie up active sites, adversely affecting the

25 protonic conductivity of the ionomer. To some extent, this can be monitored by high frequency resistance (HFR), as it is a diagnostic tool in determining the condition of the CMA. As observed in Figure 11, the final HFR did not increase over the initial value, although it did fluctuate with time. However, the HFR is

WO 98/13891

PCT/US97/17248

19

susceptible to the hydration state of the membrane. Thus it is difficult to quantify any possible decrease in the conductivity due to the inclusion of metal ions, but the figure suggests that this is not occurring to any appreciable extent, if at all.

5 In any event, the 316 SS hardware was clearly superior to the 304 SS in terms of long term stability. After disassembly of the 2,000 hour 316 SS cell, no visible corrosion of the metal components was apparent. Perhaps even better results may be obtained with 316L SS because of its lower carbon content and corresponding corrosion susceptibility. These results are very promising because the use of a relatively low-cost metal alloy without the need for any
10 special surface treatments or coatings provides a very low-cost fuel cell stack technology.

The foregoing description of the invention has been presented for purposes of illustration and description and is not intended to be exhaustive or to limit the invention to the precise form disclosed, and obviously many
15 modifications and variations are possible in light of the above teaching. The embodiments were chosen and described in order to best explain the principles of the invention and its practical application to thereby enable others skilled in the art to best utilize the invention in various embodiments and with various modifications as are suited to the particular use contemplated. It is intended that
20 the scope of the invention be defined by the claims appended hereto.

WO 98/13891

PCT/US97/17248

20

WHAT IS CLAIMED IS:

1. A polymer electrolyte membrane (PEM) fuel cell having electrodes supplied with a reactant on each side of a catalyzed membrane assembly (CMA), said fuel cell comprising:

5 a reactant distribution metal mesh defining a rectangular flow-field pattern having an inlet confined to a first corner and an outlet confined to a second corner located on a diagonal from said first corner, wherein all flow paths from said inlet to said outlet through said rectangular flow field pattern are equivalent to uniformly distribute said reactant over said CMA.

2. A PEM fuel cell according to Claim 1, wherein said reactant distribution metal mesh is a square weave screen.

3. A PEM fuel cell according to Claim 2, further including a support structure for supporting said reactant distribution metal mesh on said CMA.

4. A PEM fuel cell according to Claim 1, wherein said electrode is a bipolar plate comprising an anode electrode and a cathode electrode formed of thin conducting foils and a metal mesh flow field therebetween for distributing cooling water flow over said electrodes to remove heat generated by said fuel cell.

5 5. A PEM fuel cell according to Claim 4, further including a support structure for supporting said reactant distribution metal mesh on said CMA.

WO 98/13891

PCT/US97/17248

21

6. A PEM fuel cell according to Claim 1, wherein said CMA is a rigid structure including a rigid frame structure bonded to and supporting said membrane with conductive backings pressed into said membrane.

7. A PEM fuel cell according to Claim 6, wherein said metal mesh is a square weave screen.

8. A PEM fuel cell according to Claim 6, further including a support structure for supporting said reactant distribution metal mesh on said CMA.

9. In a PEM fuel cell stack, a bipolar plate for electrically connecting adjacent fuel cells, said bipolar plate comprising:

a thin metal foil having an anode side and a cathode side;

a first metal mesh on said anode side of said thin metal foil; and

a second metal mesh on said cathode side of said thin metal foil.

5

10. A bipolar plate according to Claim 9, wherein said thin metal foil has a thickness less than about 0.508 mm/0.020 in..

11. A bipolar plate according to Claim 10, wherein said thin metal foil has a thickness of about 0.254 mm/0.010 inc..

12. In a PEM fuel stack, a cooling plate assembly for cooling adjacent fuel cells, the cooling plate assembly comprising:

an anode electrode and a cathode electrode formed of thin conducting foils; and

5

a metal mesh flow field therebetween for distributing coolant flow over said electrodes to remove heat generated by said fuel cells.

13. A cooling plate assembly according to Claim 12, further including an electrically conductive frame contacting said anode and cathode electrodes and positioning said metal mesh flow field therebetween, said frame including manifold connections for flowing cooling water through said metal mesh.

WO 98/13891

PCT/US97/17248

22

14. A cooling plate assembly according to Claim 12, where said metal mesh is configured to generally distribute cooling water over said anode and cathode electrodes.

15. A cooling plate assembly according to Claim 12, where said metal mesh defines a rectangular flow-field pattern.

16. A fuel cell cartridge, comprising:

at least two connected fuel cells with adjacent ones of said fuel cells separated by electrically conductive, thin foil bipolar plates;

5 a first thin foil bipolar plate forming a cathode at a first end of said connected fuel cells and a second thin foil bipolar plate forming an anode at a second end of said connected fuel cells; and

first and second wire mesh flow fields contacting said first and second thin foil bipolar plates, respectively, for removing heat generated by said connected fuel cells.

17. A fuel cell cartridge according to Claim 16, wherein said thin foils are less than about 0.508 mm/0.020 in. thick.

18. A fuel cell cartridge according to Claim 17, wherein said thin foils are about 0.254 mm/0.010 in. thick.

WO 98/13891

PCT/US97/17248

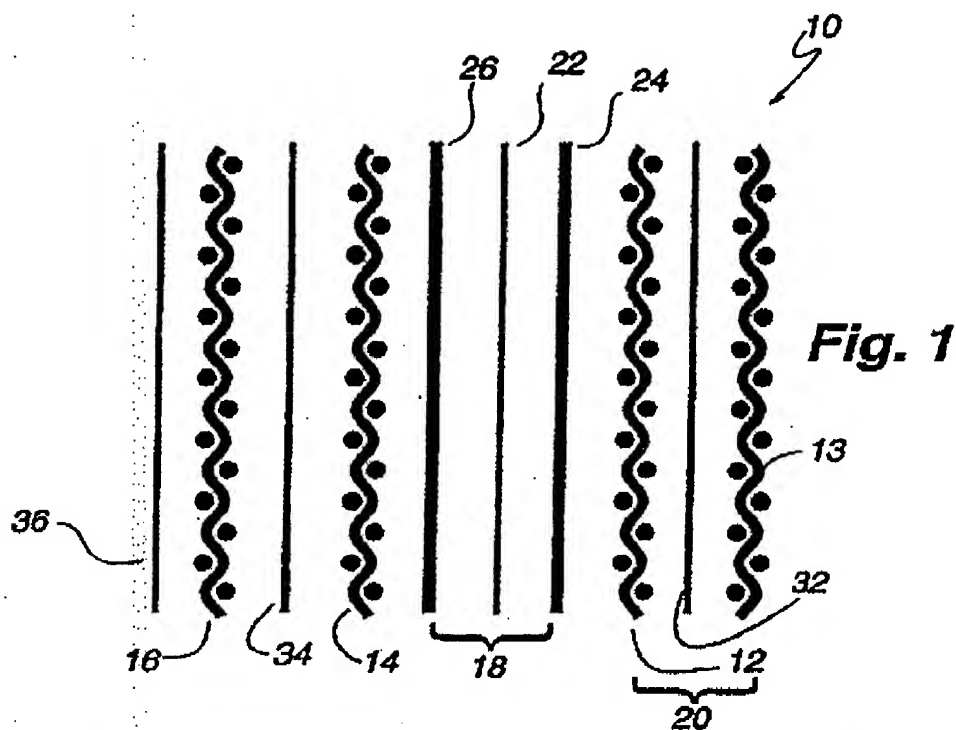


Fig. 1

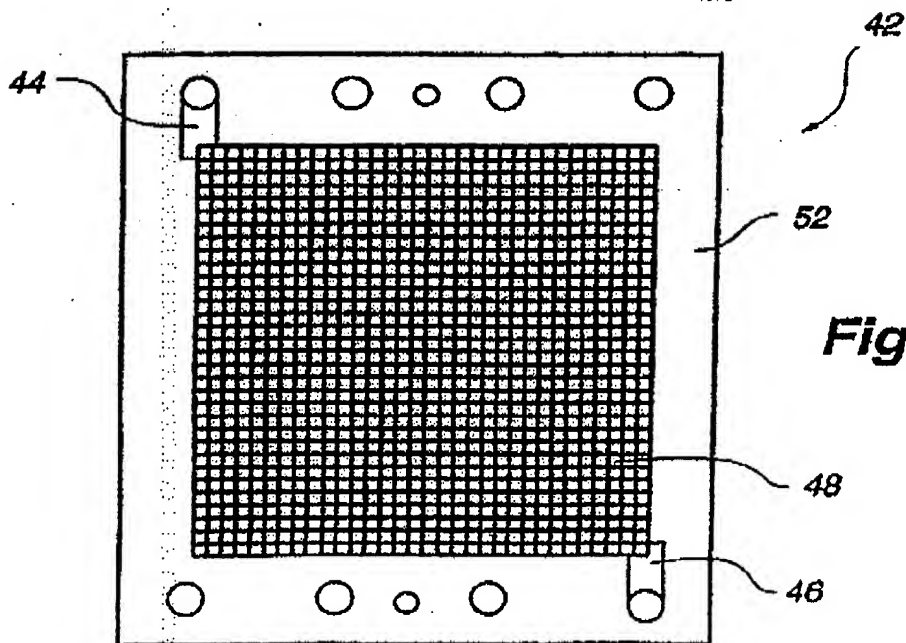
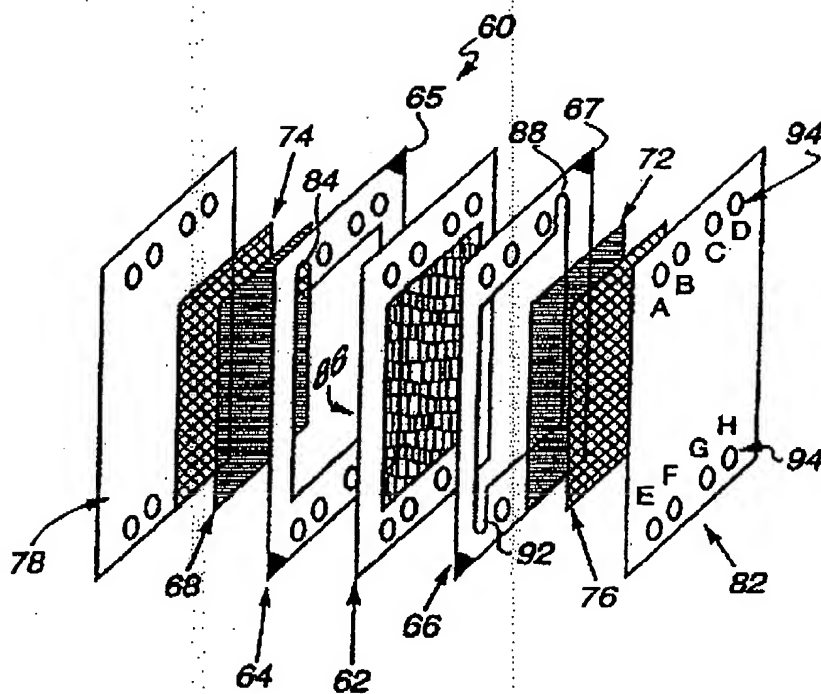


Fig. 2

WO 98/13891

PCT/US97/17248

**Fig. 4**

WO 98/13891

PCT/US97/17248

Fig. 3

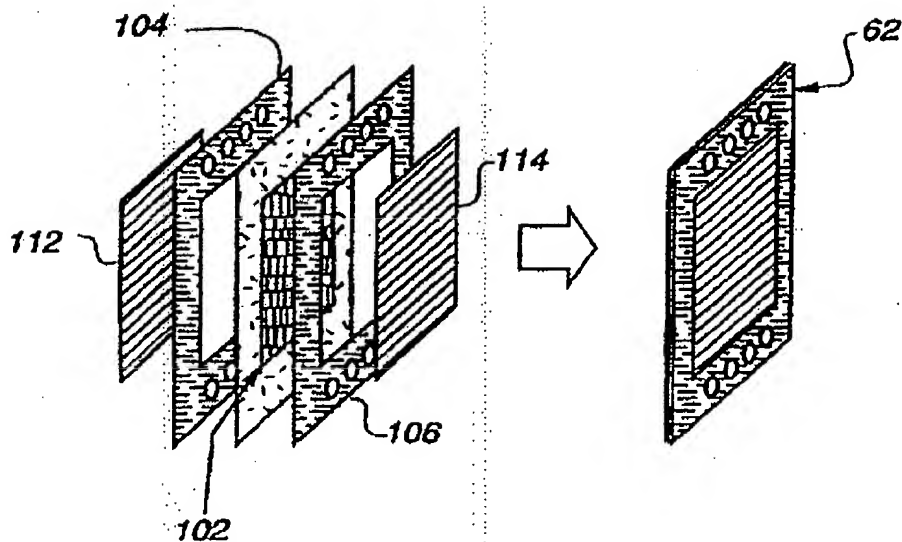
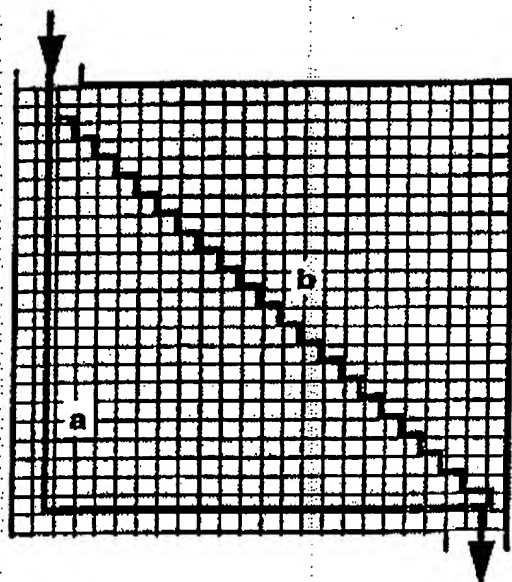


Fig. 5

3/8

WO 98/13891

PCT/US97/17248

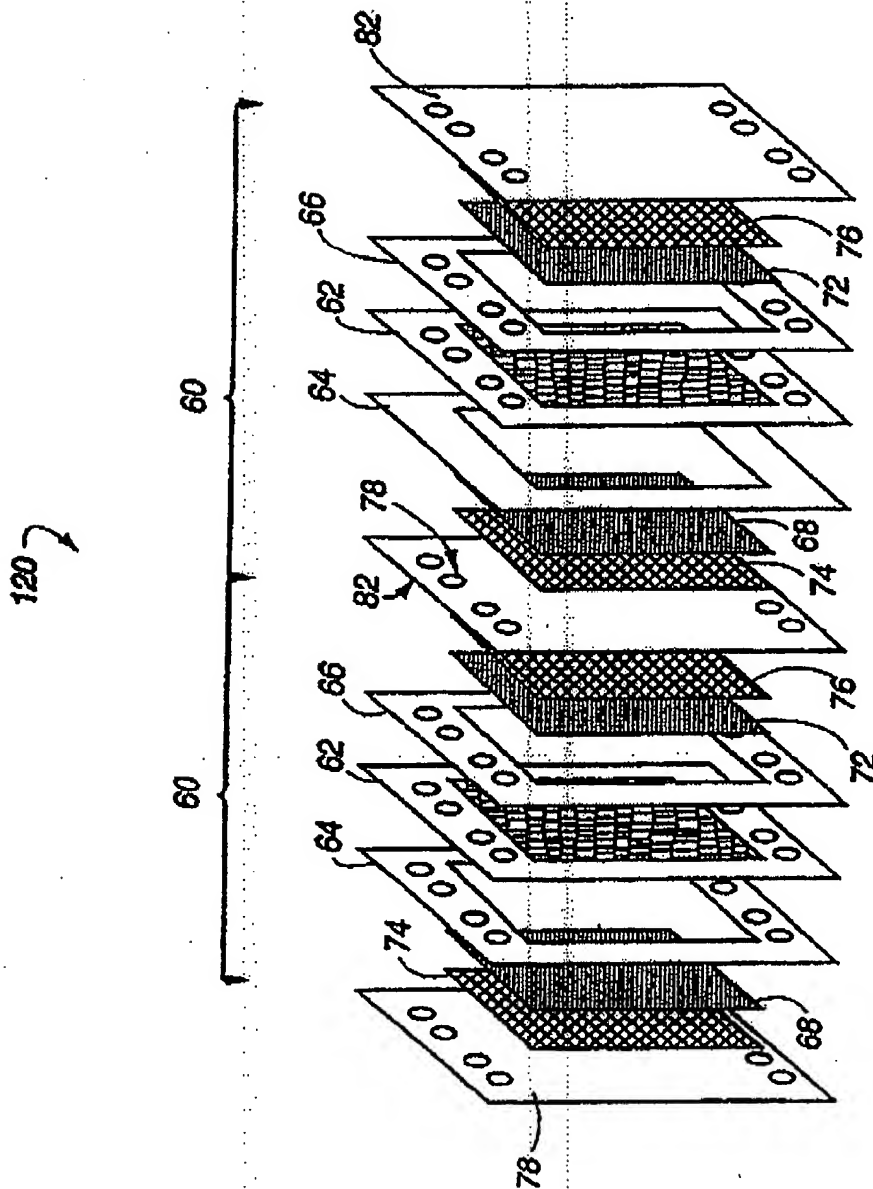
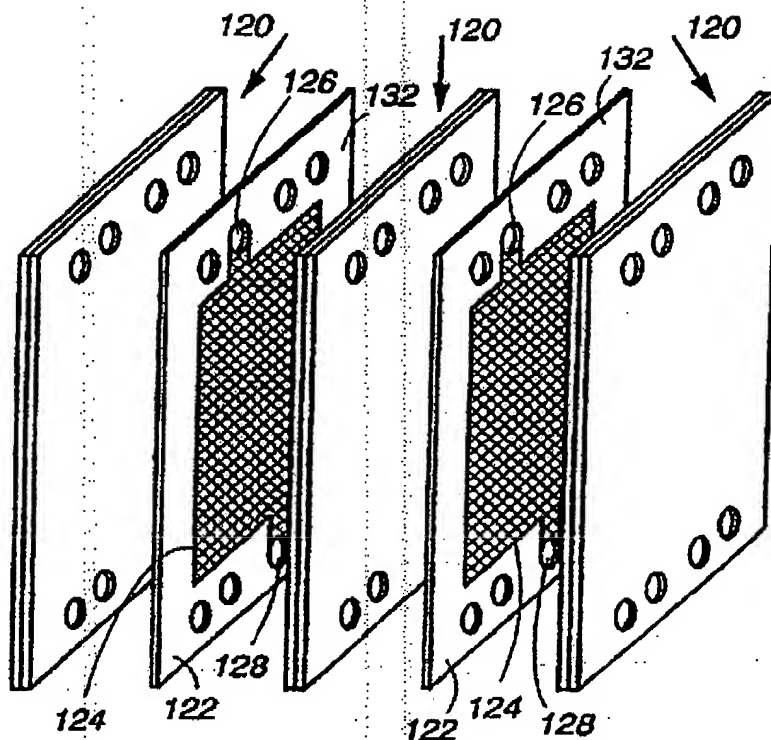


Fig. 6


WO 98/13891

PCT/US97/17248

**Fig. 7**


WO 98/13891

PCT/US97/17248

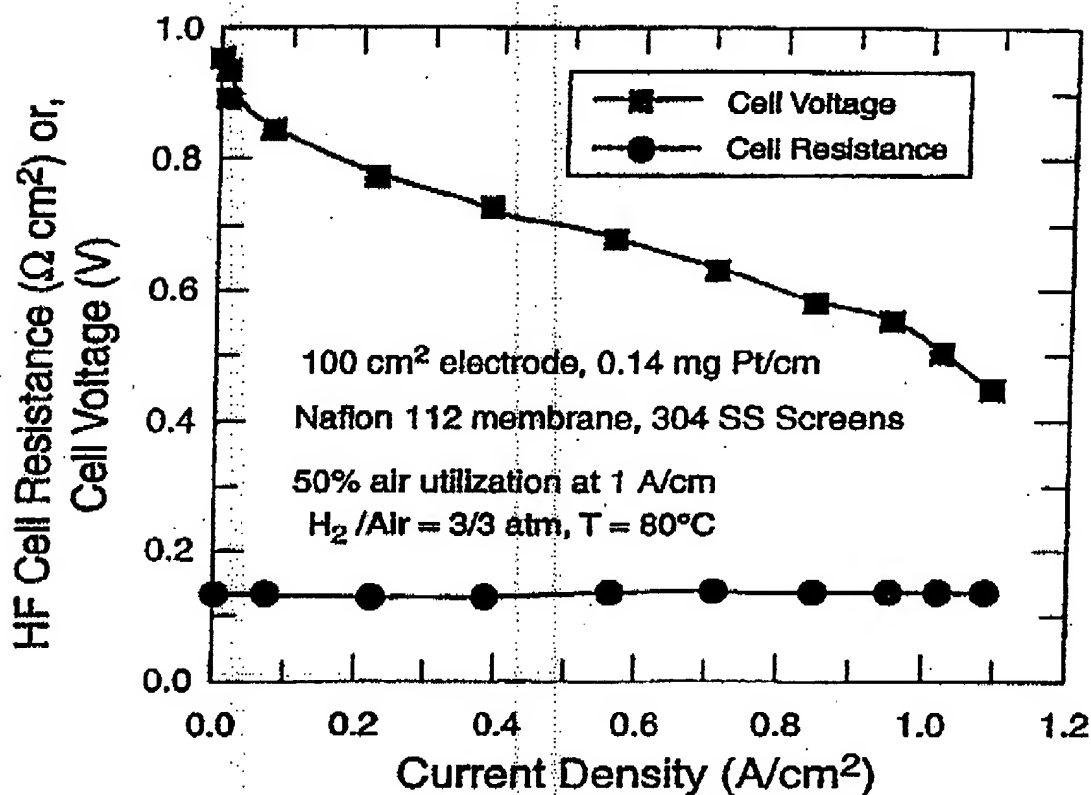**Fig. 8**



WO 98/13891

PCT/US97/17248

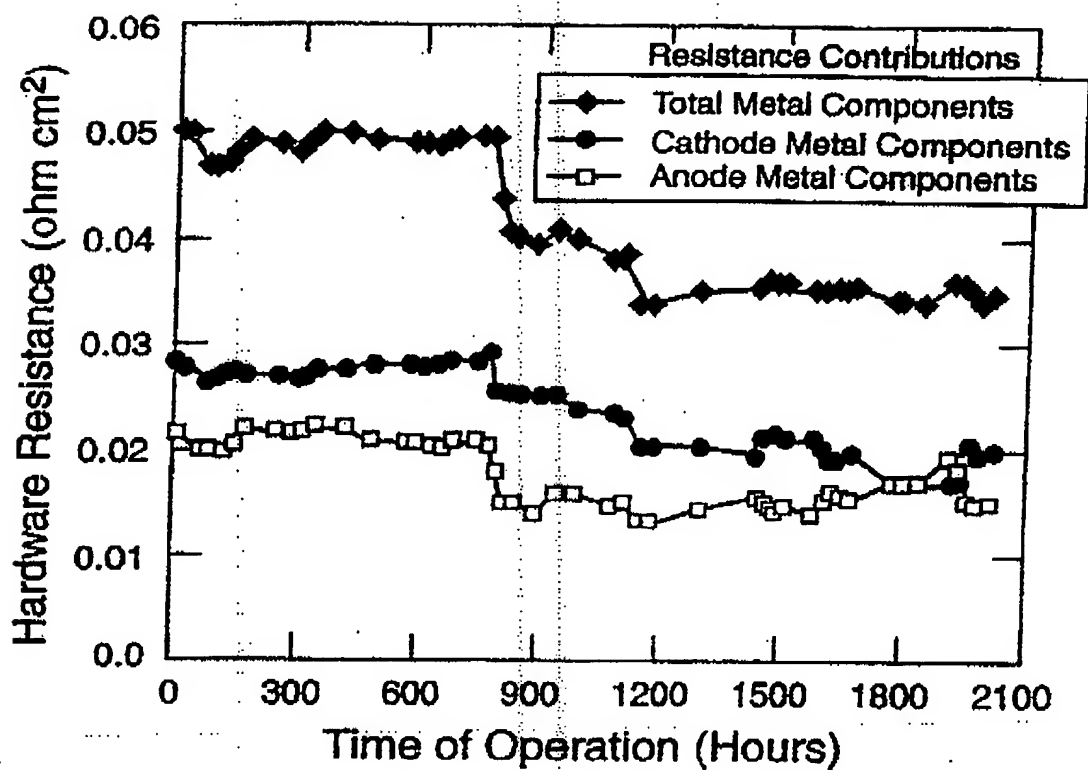**Fig. 9**

WO 98/13891

PCT/US97/17248

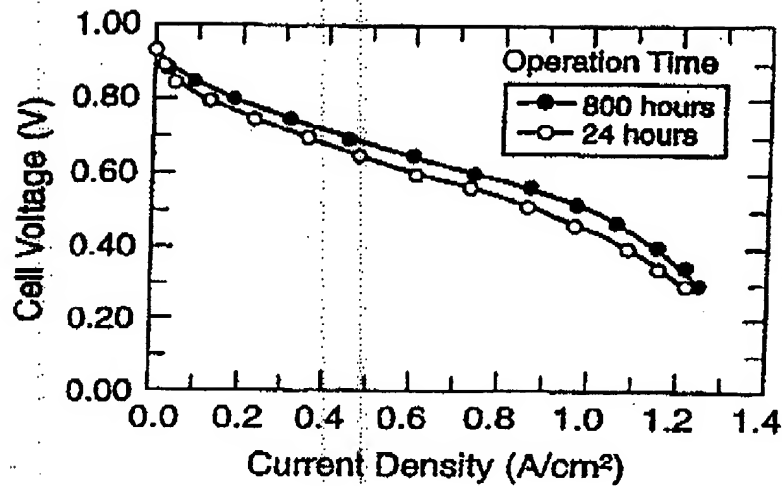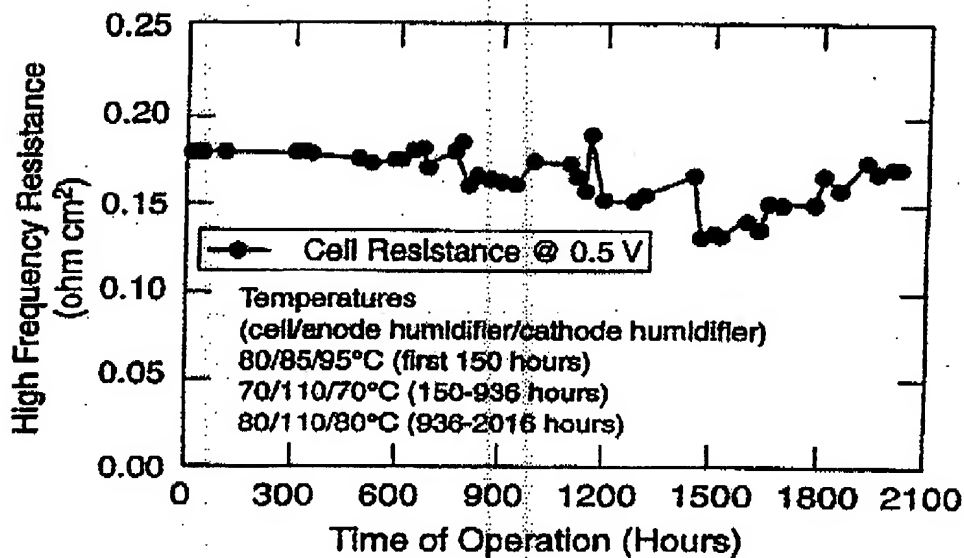**Fig. 10****Fig. 11**

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/17248

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : H01M 8/04, 8/10, 8/24 US CL : 429/34, 26, 210, 33 According to International Patent Classification (IPC) or to both national classification and IPC																									
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 429/34, 26, 210, 33, 12, 32, 39 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched NONE Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) NONE																									
C. DOCUMENTS CONSIDERED TO BE RELEVANT																									
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																							
A	US 5,145,752 A (GOLDSTEIN ET AL.) 08 September 1992, Figure 1	1-18																							
A	US 5,482,792 A (FAITA ET AL.) 09 January 1996, Figure 1	1-18																							
A	GOTTESFELD ET AL. PEM Fuel Cell Stack Development, Proceedings of First International Symposium on Proton Conducting Membrane Fuel Cells I, No Date, Proceedings Volume 95-23	1-18																							
A	US 3,963,519 A (LOUIE) 15 June 1976, Figure 1	1-18																							
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.																									
<table border="0"><tr><td>* Special categories of cited documents</td><td>* T</td><td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td></tr><tr><td>* A</td><td>document defining the general state of the art which is not considered to be of particular relevance</td><td>* X</td><td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td></tr><tr><td>* B</td><td>earlier document published on or after the international filing date</td><td>* Y</td><td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td></tr><tr><td>* L</td><td>document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td><td>* A</td><td>document member of the same patent family</td></tr><tr><td>* O</td><td>document referring to an oral disclosure, use, exhibition or other means</td><td></td><td></td></tr><tr><td>* P</td><td>document published prior to the international filing date but later than the priority date claimed</td><td></td><td></td></tr></table>			* Special categories of cited documents	* T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	* A	document defining the general state of the art which is not considered to be of particular relevance	* X	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	* B	earlier document published on or after the international filing date	* Y	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	* L	document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* A	document member of the same patent family	* O	document referring to an oral disclosure, use, exhibition or other means			* P	document published prior to the international filing date but later than the priority date claimed		
* Special categories of cited documents	* T	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																							
* A	document defining the general state of the art which is not considered to be of particular relevance	* X	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																						
* B	earlier document published on or after the international filing date	* Y	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																						
* L	document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* A	document member of the same patent family																						
* O	document referring to an oral disclosure, use, exhibition or other means																								
* P	document published prior to the international filing date but later than the priority date claimed																								
Date of the actual completion of the international search 24 DECEMBER 1997		Date of mailing of the international search report 26 JAN 1998																							
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer JOHN S. MAPLES Telephone No. (703) 308-0661																							

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/17248

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This international report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

Please See Extra Sheet.

1. ☒ As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
☒ No protest accompanied the payment of additional search fees.

Form PCT/ISA/210 (continuation of first sheet)(1)(July 1992)*

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/17248

BOX II. OBSERVATIONS WHERE UNITY OF INVENTION WAS LACKING

This ISA found multiple inventions as follows:

This application contains the following inventions or groups of inventions which are not so linked as to form a single inventive concept under PCT Rule 13.1. In order for all inventions to be searched, the appropriate additional search fees must be paid.

Group I, claims 1-8, drawn to a reactant metal mesh.

Group II, claims 9-11, drawn to a bipolar plate.

Group III, claims 12-15, drawn to a cooling plate assembly.

Group IV, claims 16-18, drawn to a fuel cell cartridge.

The inventions listed as Groups I-IV do not relate to a single inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons: Group I contains a rectangular flow-field pattern, which element is not part of any of the Groups II-IV. Group III includes a metal mesh flow-field between the anode and cathode; this element also not part of either of the Group II or Group IV. Group II comprises dual meshes on either side of a metal foil, which elements are not disclosed in Group IV.

Form PCT/ISA/210 (extra sheet)(July 1992)*

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.